


2-way blow ceiling mounted cassette

Thin, lightweight design installs easily in narrow corridors

- › Depth of all units is 620mm, ideal for narrow spaces
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!




- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible
- › Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required

Fresh air intake opening in casing




* Brings in up to 10% of fresh air into the room


- › Optimum comfort guaranteed with automatic air flow adjustment to the required load
- › Maintenance operations can be performed by removing the front panel

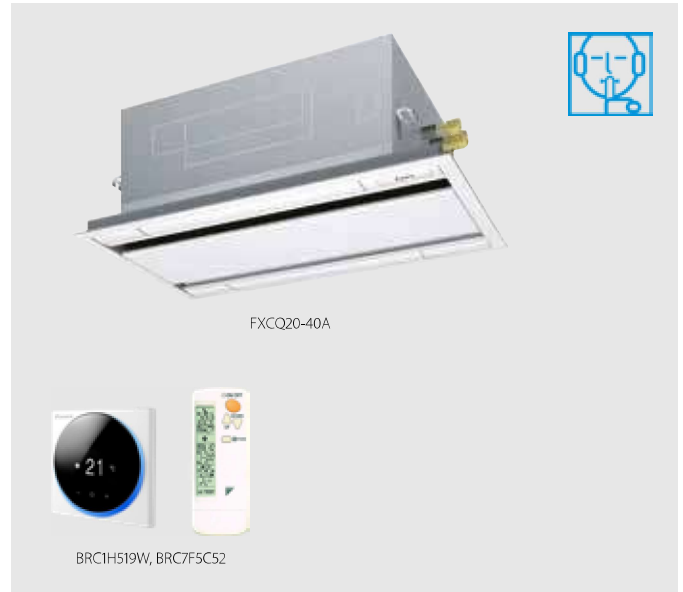


- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms

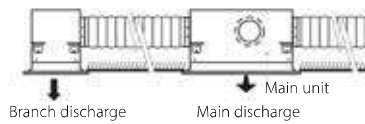

- › Standard drain pump with 580mm lift increases flexibility and installation speed



 Access all technical information on FXCQ-A at my.daikin.eu or click here

Indoor unit			FXCQ	20A	25A	32A	40A	50A	63A	80A	125A
Cooling capacity	Total capacity	Nom.	kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	14.0
	Heating capacity	Total capacity	Nom.	kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0
Power input - 50Hz	Cooling	Nom.	kW	0.031	0.039		0.041	0.059	0.063	0.090	0.149
	Heating	Nom.	kW	0.028	0.035		0.037	0.056	0.060	0.086	0.146
Dimensions	Unit	HeightxWidthxDepth	mm	305x775x620				305x990x620		305x1,445x620	
Weight	Unit		kg	19				22	25	33	38
Casing	Material			Galvanised steel plate							
Decoration panel	Model			BYBCQ40HW1			BYBCQ63HW1		BYBCQ125HW1		
	Colour			Fresh white (6.5Y 9.5/0.5)							
	Dimensions	HeightxWidthxDepth	mm	55x1,070x700				55x1,285x700		55x1,740x700	
	Weight		kg	10				11		13	
Fan	Air flow rate - 50Hz	Cooling Low/High	m ³ /min	7.5/10.5	8/11.5		8.5/12	10.5/15	11.5/16	18.5/26	22.5/32
Air filter	Type			Resin net with mold resistance							
Sound power level	Cooling	Nom./High	dBA	46/48	47/50	48/50	49/52	51/53	53/55	54/58	58/62
Sound pressure level	Cooling	Low/Nom./High	dBA	28.0/30.0/32.0	29.0/31.0/34.0	30.0/32.0/34.0	31.0/33.0/36.0	31.0/35.0/37.0	32.0/37.0/39.0	33.0/38.0/42.0	38.0/42.0/46.0
	Heating	Low/Nom./High	dBA	28.0/30.0/32.0	29.0/31.0/34.0	30.0/32.0/34.0	31.0/33.0/36.0	31.0/35.0/37.0	32.0/37.0/39.0	33.0/38.0/42.0	38.0/42.0/46.0
Refrigerant	Type/GWP			R-410A/2,087.5							
Piping connections	Liquid	OD	mm	6.35						9.52	
	Gas	OD	mm	12.7						15.9	
	Drain			VP25 (O.D. 32 / I.D. 25)							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240							
Current - 50Hz	Maximum fuse amps (MFA)		A	16							
Control systems	Infrared remote control			BRC7C52							
	Wired remote control			BRC1H519W/S/K / BRC1E53A/B/C / BRC1D52							