




# Ceiling mounted corner cassette


## 1-way blow unit for corner installation

- › Compact dimensions, can easily be mounted in a narrow ceiling void (only 220mm ceiling space required, 195 with panel spacer, available as accessory)
- › Optimum air flow conditions are created by either downward air discharge or frontal air discharge (via optional grille) or a combination of both



- › Maintenance operations can be performed by removing the front panel
- › Standard drain pump with 330mm lift increases flexibility and installation speed

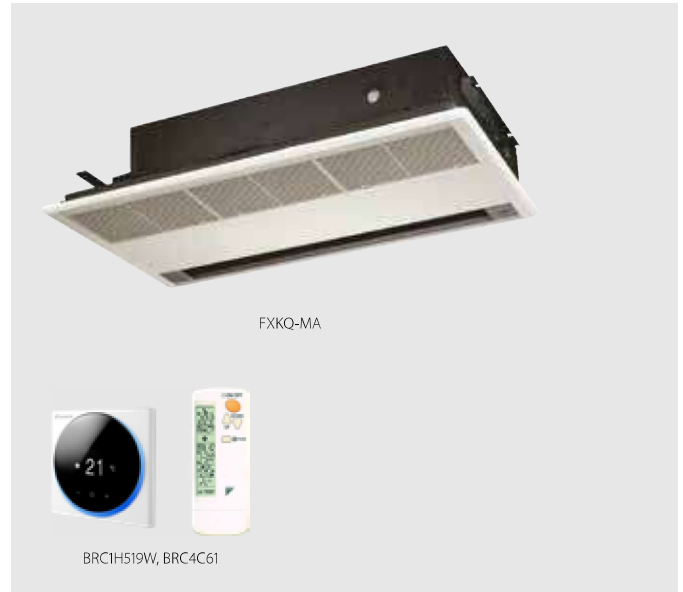

 Access all technical information on FXKQ-MA at [my.daikin.eu](http://my.daikin.eu) or [click here](#)

Indoor unit				FXKQ	25MA	32MA	40MA	63MA
Cooling capacity	Total capacity	Nom.		kW	2.8	3.6	4.5	7.10
Heating capacity	Total capacity	Nom.		kW	3.2	4.0	5.0	8.00
Power input - 50Hz	Cooling	Nom.		kW	0.066		0.076	0.105
	Heating	Nom.		kW	0.046		0.056	0.085
Dimensions	Unit	HeightxWidthxDepth		mm	215x1,110x710			215x1,310x710
Weight	Unit			kg	31			34
Casing	Material				Galvanised steel plate			
Decoration panel	Model				BYK45FJW1			BYK71FJW1
	Colour				White			
	Dimensions	HeightxWidthxDepth		mm	70x1,240x800			70x1,440x800
	Weight			kg	8.5			9.5
Fan	Air flow rate - 50Hz	Cooling	Low/High	m <sup>3</sup> /min	9/11		10/13	15/18
Air filter	Type				Resin net with mold resistance			
Sound power level	Cooling	High		dBA	54		56	58
	Sound pressure level	Cooling	Low/High	dBA	33.0/38.0		34.0/40.0	37.0/42.0
Refrigerant	Type/GWP				R-410A/2,087.5			
Piping connections	Liquid	OD		mm	6.35			9.52
	Gas	OD		mm	12.7			15.9
	Drain				VP25 (O.D. 32 / I.D. 25)			
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220			
Current - 50Hz	Maximum fuse amps (MFA)			A	15			
Control systems	Infrared remote control				BRC4C61			
	Wired remote control				BRC1H519W/S/K / BRC1E53A/B/C / BRC1D52			