



# Floor standing unit

## For perimeter zone air conditioning

- › Unit can be installed as free standing model by use of optional back plate
- › Its low height enables the unit to fit perfectly beneath a window
- › Stylish modern casing finished in pure white (RAL9010) and iron grey (RAL7011) blends easily with any interior
- › Requires very little installation space

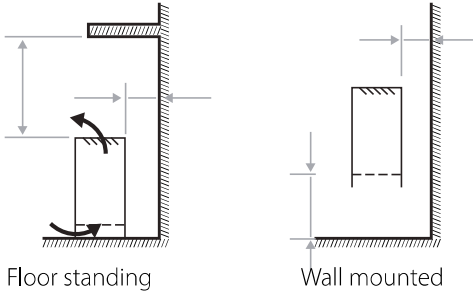


- › Wall mounted installation facilitates cleaning beneath the unit where dust tends to accumulate

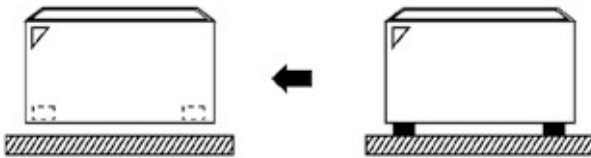

- › Wired remote control can easily be integrated in the unit



 Access all technical information on FXLQ-P at [my.daikin.eu](http://my.daikin.eu) or click here

Indoor unit			FXLQ	20P	25P	32P	40P	50P	63P						
Cooling capacity	Total capacity	Nom.	kW	2.2	2.8	3.6	4.5	5.6	7.1						
Heating capacity	Total capacity	Nom.	kW	2.5	3.2	4.0	5.0	6.3	8.0						
Power input - 50Hz	Cooling	Nom.	kW	0.05		0.09		0.11							
	Heating	Nom.	kW	0.05		0.09		0.11							
Dimensions	Unit	HeightxWidthxDepth	mm	600x1,000x232		600x1,140x232		600x1,420x232							
Weight	Unit		kg	27		32		38							
Fan	Air flow rate - 50Hz	Cooling	Low/High	m <sup>3</sup> /min		6.0/7		6.0/8		8.5/11		11.0/14		12.0/16	
		High													
Air filter	Type			Resin net											
Sound power level	Cooling	High	dB(A)	54				57		58		59			
	Sound pressure level	Cooling	Low/High	dB(A)		32/35		33/38		34/39		35/40			
	Heating	Low/High	dB(A)		32/35		33/38		34/39		35/40				
	Refrigerant	Type/GWP		R-410A/2,087.5											
Piping connections	Liquid	OD	mm	6.35				9.52							
	Gas	OD	mm	12.7				15.9							
	Drain			O.D. 21 (Vinyl chloride)											
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220											
Current - 50Hz	Maximum fuse amps (MFA)		A	15											
Control systems	Infrared remote control			BRC4C65											
	Wired remote control			BRC1H519W/S/K / BRC1E53A/B/C / BRC1D52											