


Slim concealed ceiling unit


Slim design for flexible installation

- › Compact dimensions, can easily be mounted in a ceiling void of only 240mm




SERIE A (15, 20, 25, 32)



- › Medium external static pressure up to 44Pa facilitates unit use with flexible ducts of varying lengths
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › Auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- › Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- › Flexible installation, as the air suction direction can be altered from rear to bottom suction

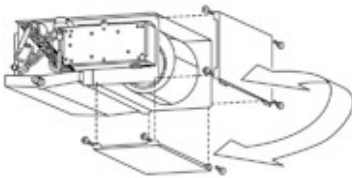

- › Standard drain pump with 750mm lift increases flexibility and installation speed

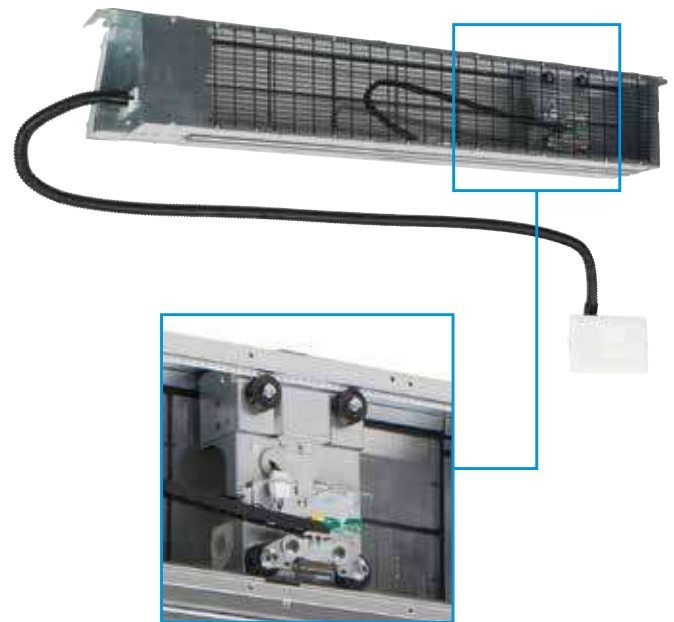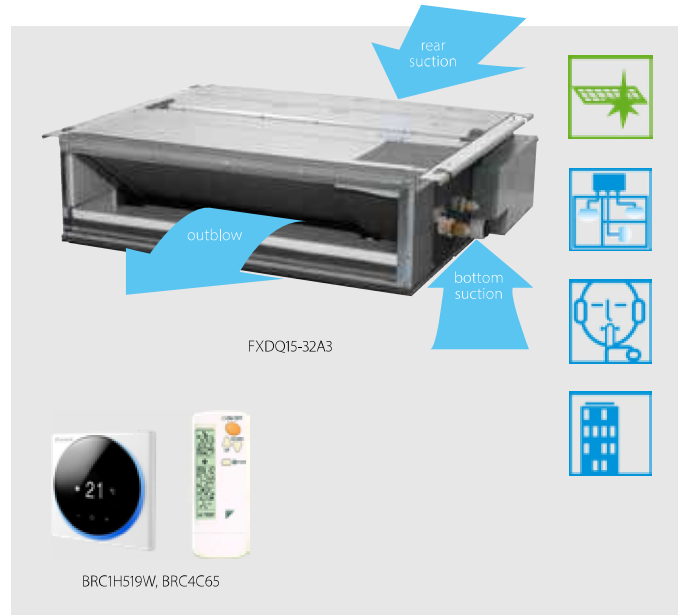

Auto cleaning filter option



Access all technical information on FXDQ-A3 at my.daikin.eu or click here



Access all technical information on BAE20A at my.daikin.eu or click here

Indoor unit			FXDQ	15A3	20A3	25A3	32A3	40A3	50A3	63A3
Cooling capacity	Total capacity	Nom.	kW	1.70	2.20	2.80	3.60	4.50	5.60	7.10
Heating capacity	Total capacity	Nom.	kW	1.90	2.50	3.20	4.00	5.00	6.30	8.00
Power input - 50Hz	Cooling	Nom.	kW	0.071			0.078		0.099	0.110
	Heating	Nom.	kW	0.068			0.075		0.096	0.107
Required ceiling void >			mm	240						
Dimensions	Unit	HeightxWidthxDepth	mm	200x750x620			200x950x620		200x1,150x620	
Weight	Unit		kg	22.0			26.0		29.0	
Casing	Material			Galvanised steel						
Fan	Air flow rate - 50Hz	Cooling	Low/High	m ³ /min	6.4/7.5	6.4/8.0		8.5/10.5	10.0/12.5	13.0/16.5
	External static pressure - 50Hz	Nom./High		Pa	10/30.0			15/44.0		
Air filter	Type			Removable / washable						
Sound power level	Cooling	High	dBA	50	51		52	53	54	
Sound pressure level	Cooling	Low/Nom./High	dBA	27.0/31.0/32.0	27.0/31.0/33.0		28.0/32.0/34.0	29.0/33.0/35.0	30.0/34.0/36.0	
Refrigerant	Type/GWP			R-410A/2,087.5						
Piping connections	Liquid	OD	mm	6.35			9.52			
	Gas	OD	mm	12.7			15.9			
	Drain			VP20 (I.D. 20/O.D. 26)						
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220						
Current - 50Hz	Maximum fuse amps (MFA)		A	16						
Control systems	Infrared remote control			BRC4C65 / BRC4C66						
	Wired remote control			BRC1H519W/S/K / BRC1E53A/B/C/ BRC1D52						